

The daggerboard shall be generally a rectangular flat plane in shape.
Rule 3.3.2.1

The weight of the daggerboard shall be not less than 2.0 kg
Rule 3.3.3

Daggerboard shall float. Ballasting or cut outs in the daggerboard and stop battens are prohibited.
Rule 3.3.3 3.3.4

Rule 3.3.2.2
(see also sheet 1)

DAGGERBOARD GENERAL DIMENSIONS

Rule 3.3.2


INTERNATIONAL OPTIMIST

Foil plan sheet 2/7


Date: March 2003

This plan shall be read in conjunction with the latest Class Rules

© 1992 International Yacht Racing Union



Wooden board
Wooden battens




Foam GRP board
Wooden battens



Foam GRP board,
battens
integrated



Moulded construction made
of two symmetrical parts

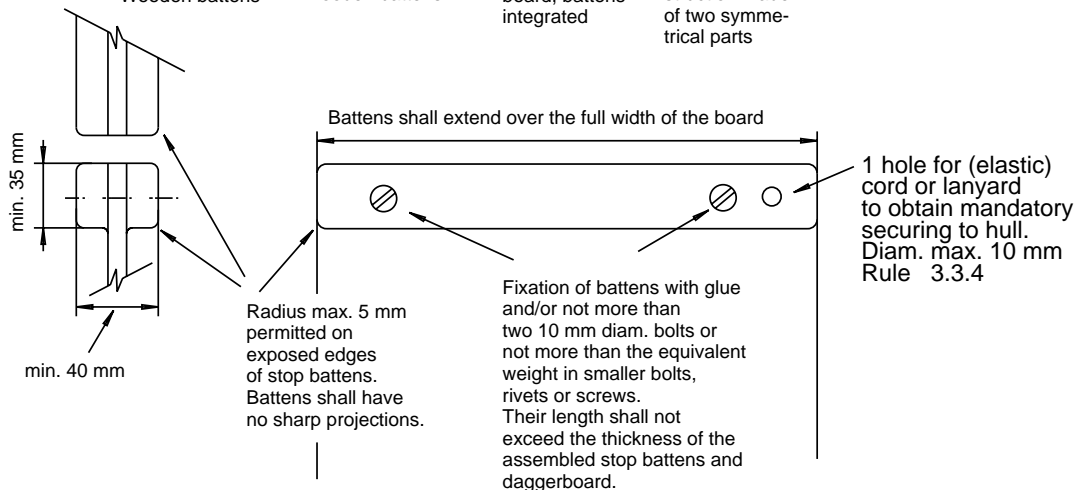

Ballasting or cut outs of the battens are prohibited

STOP BATTENS

Rule 3.3.2.4

INTERNATIONAL OPTIMIST

Foil plan sheet 3/7



Date: March 2003

This plan shall be read in conjunction with the latest Class Rules

© 1992 International Yacht Racing Union

Optional (elastic) cord or tape to hold daggerboard in position
Rule 3.3.5


1 hole in stop battens diam. max. 10 mm
Rule 3.3.4

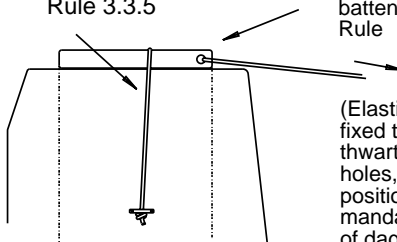


(Elastic) cord to be fixed to the mast-thwart through two holes, for optional positioning and or mandatory securing of daggerboard.
Rule 3.3.4

max. 2 eyes to secure cord or tape.
Position optional.


16 mm +/- 2



Optional non metallic strips for easy daggerboard slot opening adjustment (16 mm + - 2)
Daggerboard slot opening between the strips shall be uniform throughout it's length.
Rule 3.2.6.1 (i)



16 mm +/- 2



max. 30 mm

max. 30 mm

Optional non metallic material to protect edges of daggerboard.
Rule 3.2.6.1 (i)

16 mm +/- 2

DAGGERBOARD POSITIONING

Rule: 3.2.3
3.3.5


INTERNATIONAL OPTIMIST

Foil plan sheet 4/7

Date: March 2003


This plan shall be read in conjunction with the latest Class Rules

© 1992 International Yacht Racing Union

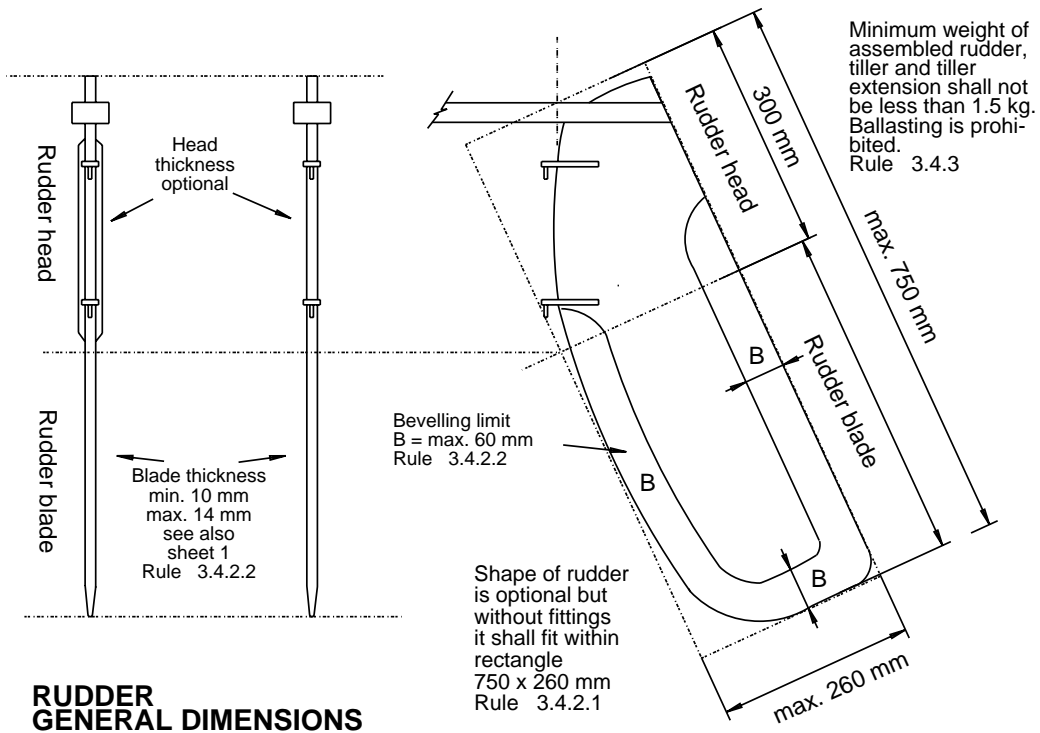


**RUDDER
GENERAL DIMENSIONS**


Rule 3.4

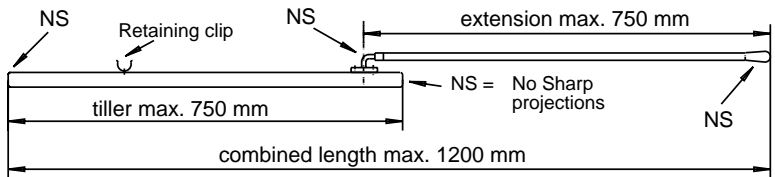

Tiller and tiller extension may be of any type and may be made of any material.
 Rule 3.4.1.2 3.4.2.3




M =
 Measurement of tiller length if tiller is permanently fixed and/or invisible.



Examples of assembled rudder and tiller. Tiller need not be permanently fixed.
 The assembled rudder, tiller and tiller extension shall float.
 Rule 3.4.3

TILLER & TILLER EXTENSION

Rule: 3.4.1
 3.4.2.2

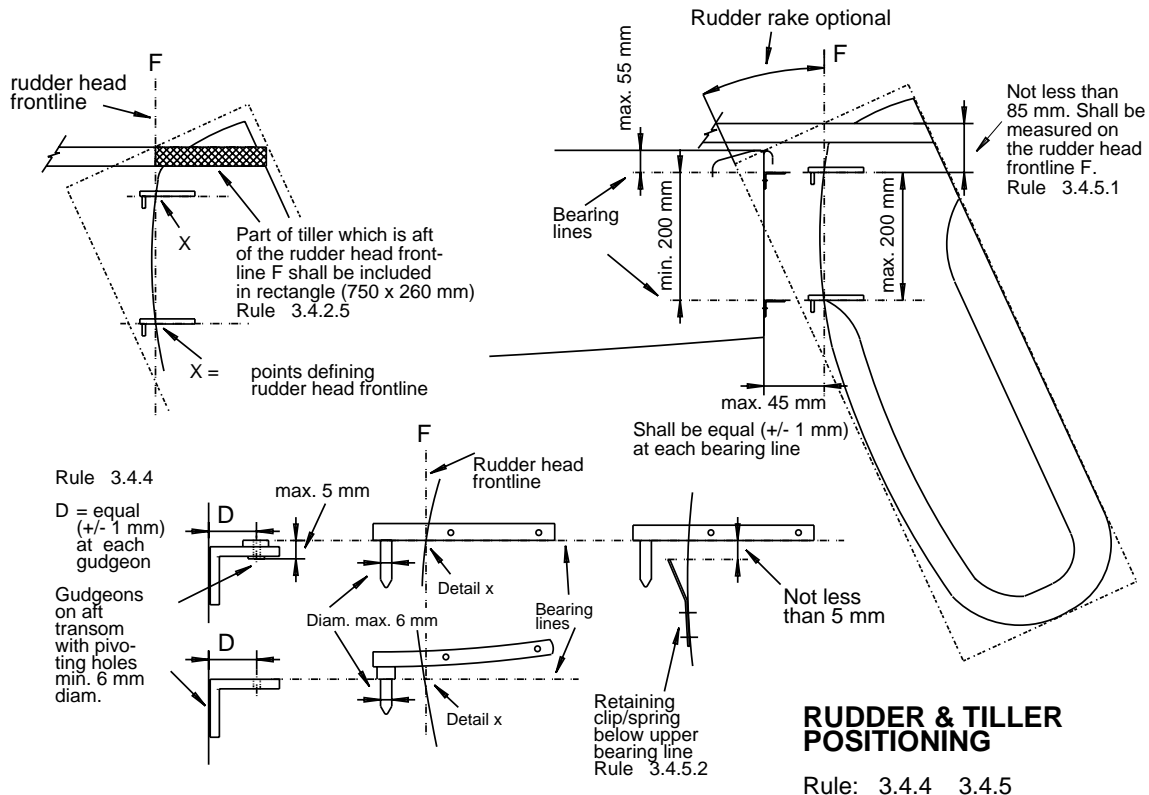

INTERNATIONAL OPTIMIST

Foil plan sheet 7/7

Date: March 2003

This plan shall be read in conjunction with the latest Class Rules

© 1992 International Yacht Racing Union